
Wheelchair/Walker Bag

Cut = 2 outside rectangles 14 x 16
2 lining rectangles 14 x 16




cut a 1" ½" square from each bottom corner

= 1 pocket outside 7" x 16
1 pocket lining 7" x 16


= 2 straps $4\frac{1}{2} \times 9\frac{1}{2}$
(or use webbing)

Sewing

sew 3/8" seams

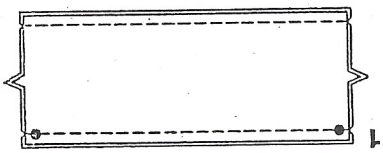1. 

with right sides together, pin pocket outside to pocket lining. Stitch upper and lower edges. Turn to right side. Press. topstitch upper edge.

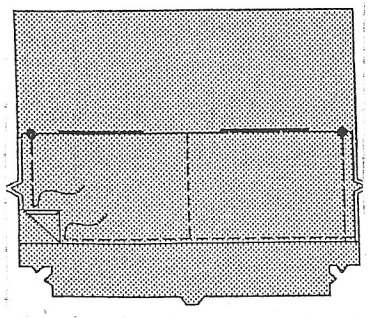


Pin pocket to right side of bag $2\frac{1}{2}$" from bottom edge. Stitch close to bottom edge. Stitch down Middle to form 2 pockets. (More if desired)

Pocket goes on outside of bag.

2. Make 2 straps. fold long sides to center and to center again. topstitch both long sides.


add a piece of velcro 3/4" x 1 1/2" to one end of strap. zig zag raw edge to "finish" edge.

on outside of bag (front) add straps 2" in from outside edge. along top.

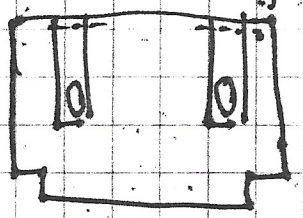


3.

3/8" seams

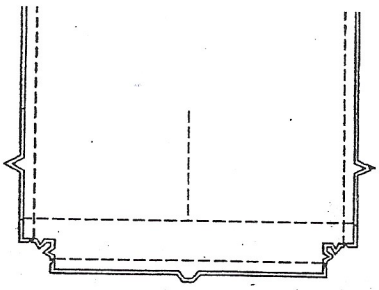

stitch front to back at side seams and lower edge.

on inside bring side seam and lower seam together. stitch across ends.






Stitch side and lower seams of bag ~~facing~~ lining leaving an opening at lower edge to turn. With RIGHT sides together, pin ~~facing~~ lining to bag (over straps). Stitch upper edge.

Place "bag outside" inside the lining right sides together.

Turn bag to RIGHT side through opening in ~~facing~~ lining. Slip-stitch opening closed. Insert ~~facing~~ lining INSIDE bag. Stitch close to upper edge of bag.

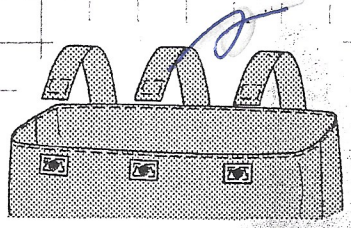

BAG BACK

Only use two straps

Turn bag to RIGHT side. Center fuzzy portion of Velcro® over large dots on bag back. Stitch close to outer edges.

Fold straps and fasten Velcro®.